


Megabit Ethernet Switch NX-A2000-8T

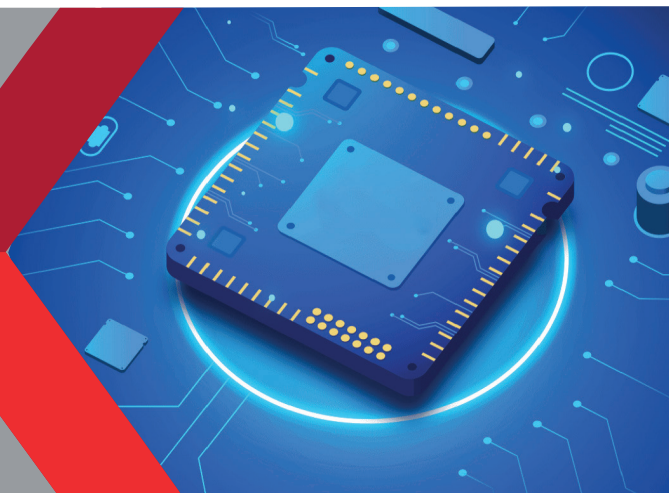

OVERVIEW

NODEXON Umanaged Switch with 8×10/100 Base-T. Using store-and-forward mode to provide stable and reliable power and data transmission. Outstanding on small enterprises, small-scale surveillance and SOHO, The switches feature plug and play, zero configuration and compatibility with a variety of terminals such as network cameras, printers, PCs, etc., to offer fast deployment experience.

FEATURES HIGHLIGHTS

- › Power input : DC 5V
- › Thermal methods : Fanless
- › Shell : ABS Plastic
- › Report : CCC/CE/FCC/RoHS
- › MTBF : 100000 Hours




TECHNICAL SPECIFICATIONS

SPECIFICATIONS	NX-A2000-8T
Fixed port	8*10/100 Base—T
Power interface	DC Plug
LED indicator	PWR, Active, Link
Twisted-pair	0-100
Input voltage	DC 5V
Power Consumption	≤10W
Switching capacity	1.6 G



Megabit Ethernet Switch NX-A2000-8T

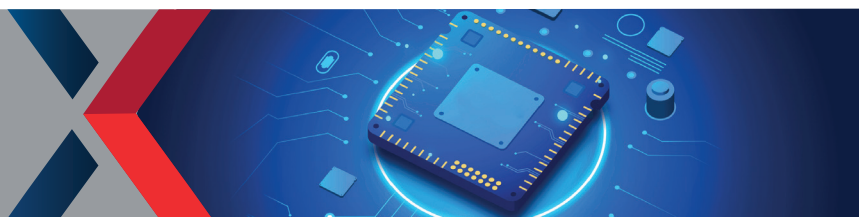


TECHNICAL SPECIFICATIONS

SPECIFICATIONS	NX-A2000-8T
Packet forwarding rate	1.19 Mpps
MAC address table	4 K
Buffer	768 k bytes
Forwarding delay	<5 us
MDI/MDIX	Support
Jumbo Frame	Support 10K bytes
Operating temperature	0°C~+50°C
Storage temperature	-40°C~+70°C
Relative humidity	10%~90% (non-condensing)
Thermal methods	Fanless
MTBF	100,000 Hours
Product size	145*85*25 mm
Installation Method	Desktop
Weight	0.147 KG
Surge protection of Ethernet port	IEC 61000-4-5 Level 4 (4/2KV)
Free fall	0.5m
Accessories	Device, Terminals, Specification, Certificate ,Adapter (optional)



Megabit Ethernet Switch NX-A2000-8T

TECHNICAL DIAGRAM

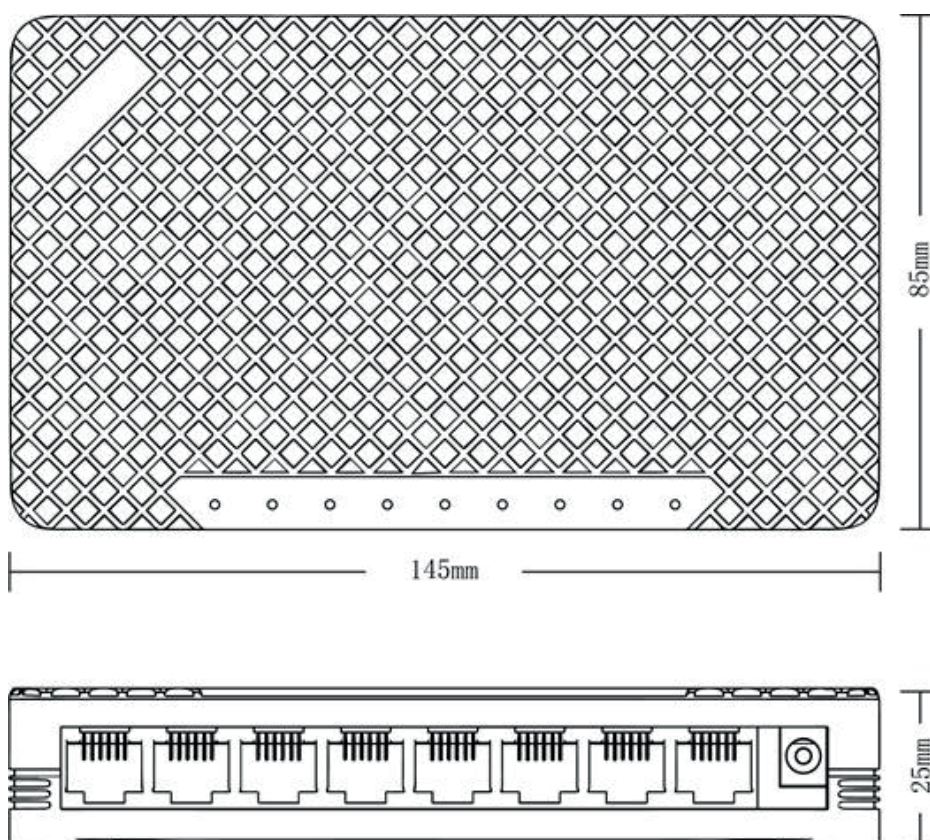

USA

Tel +1 877 677 4040
info@nodexon.com
152 East 118th Street,
New York, NY 10035

EUROPE

Tel +44 746 6717286
uk@nodexon.com
Fairbourne Drive, Atterbury,
Buckinghamshire, UK

MIDDLE EAST

Tel +971 44 558570
mena@nodexon.com
Boulevard Plaza Tower One, Level 3,
Downtown Dubai, UAE

